



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : H04N 7/16, 7/167	A1	(11) International Publication Number: WO 97/38530 (43) International Publication Date: 16 October 1997 (16.10.97)
<p>(21) International Application Number: PCT/EP97/01557</p> <p>(22) International Filing Date: 21 March 1997 (21.03.97)</p> <p>(30) Priority Data: 96200907.2 3 April 1996 (03.04.96) EP</p> <p>(34) Countries for which the regional or international application was filed: AT et al.</p> <p>(71) Applicant (for all designated States except US): DIGCO B.V. [NL/NL]; Jupiterstraat 42, NL-2132 HD Hoofddorp (NL).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): RIX, Simon, Paul, Ashley [ZA/ZA]; 51 Ixia Road, Primrose Hill, Germiston, Transvaal (ZA). GLASSPOOL, Andrew [GB/GB]; Telford Point, Telford Road, Basingstoke RG21 2XZ (GB). DAVIES, Donald, Watts [GB/GB]; 15 Hawkewood Road, Sunbury-on-Thames, Middlesex TW16 6HL (GB).</p> <p>(74) Agents: DE VRIES, Johannes, Hendrik, Fokke et al.; De Vries &amp; Metman B.V., Overschiestraat 184 N, NL-1062 XK Amsterdam (NL).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	
<p>(54) Title: METHOD FOR PROVIDING A SECURE COMMUNICATION BETWEEN TWO DEVICES AND APPLICATION OF THIS METHOD</p> <div data-bbox="425 1159 1273 1682"> <pre> sequenceDiagram     participant CAM as CAM     participant SC as SC     Note left of CAM: random generation of Ci and A     CAM-&gt;&gt;SC: transfer of Ci and A encrypted under Cam public key     Note right of SC: decrypt Ci and A using CAM secret key     SC-&gt;&gt;CAM: transfer of A encrypted under Ci     Note left of CAM: decrypt and verify A     CAM-&gt;&gt;SC: transfer of ECM's     Note right of SC: process ECM and extract control word     SC-&gt;&gt;CAM: transfer of control word encrypted under Ci     Note left of CAM: decrypt control word using Ci           </pre> <p>The diagram illustrates a secure communication protocol between two devices, CAM (Conditional Access Module) and SC (Smart Card). The process involves the following steps:</p> <ol style="list-style-type: none"> <li><b>Random generation of <math>C_i</math> and <math>A</math>:</b> CAM generates a random key <math>C_i</math> and a message <math>A</math>.</li> <li><b>Transfer of <math>C_i</math> and <math>A</math> encrypted under <math>C_{am}</math> public key:</b> CAM sends the encrypted data to SC.</li> <li><b>Decrypt <math>C_i</math> and <math>A</math> using CAM secret key:</b> SC decrypts the received data using its secret key.</li> <li><b>Transfer of <math>A</math> encrypted under <math>C_i</math>:</b> SC sends the encrypted message <math>A</math> back to CAM.</li> <li><b>Decrypt and verify <math>A</math>:</b> CAM decrypts and verifies the received message <math>A</math>.</li> <li><b>Transfer of ECM's:</b> CAM sends ECM's (Error Correction Messages) to SC.</li> <li><b>Process ECM and extract control word:</b> SC processes the ECM's and extracts the control word.</li> <li><b>Transfer of control word encrypted under <math>C_i</math>:</b> SC sends the encrypted control word back to CAM.</li> <li><b>Decrypt control word using <math>C_i</math>:</b> CAM decrypts the control word using the random key <math>C_i</math>.</li> </ol> </div> <p>(57) Abstract</p> <p>In a method for providing a secure communication between two devices, a first device generates a random key (<math>C_i</math>) and transfers this key to a second device in a first message encrypted using a public key. The second device decrypts the first encrypted message by means of a corresponding secret key to obtain the random key (<math>C_i</math>) and this random key is used to encrypt and decrypt all transmissions between these devices. In a decoder for a pay TV system, comprising a conditional access module and a smart card, this method is applied to provide a secure communication between the control access module and the smart card and/or between the decoder and the conditional access module.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method for providing a secure communication between two devices and application of this method

The present invention relates to a method for providing a secure communication between two devices, in particular between devices used in a pay TV system.

In a pay TV system each subscriber generally has  
5 a decoder for descrambling the source component signal, wherein said decoder comprises a conditional access module and a smart card for decrypting entitlement control messages and entitlement management messages. In order to prevent unauthorized operation of the decoder for descrambling a  
10 source component signal it is important to prevent switching between an authorized and an unauthorized smart card for example.

The invention aims to provide a method of the above-mentioned type wherein the communication between two devi-  
15 ces, such as the control access module and the smart card or the decoder and the conditional access module, is arranged in such a manner that switching between authorized and unauthorized devices is not possible.

According to the invention a method is provided,  
20 wherein a first device generates a random key ( $C_i$ ) and transfers said key to a second device in a first message encrypted using a public key, wherein said second device decrypts the first encrypted message by means of a corresponding secret key to obtain said random key ( $C_i$ ), wherein  
25 said random key is used to encrypt and decrypt further transmissions between said devices.

According to the invention this method can be applied in a decoder for a pay TV system, wherein said decoder comprises a conditional access module and a smart card,  
30 wherein said method is applied to provide a secure communication between the control access module and the smart

card or between the decoder and the conditional access module.

The invention further provides a decoder for a pay TV system, comprising a conditional access module and a smart card, said conditional access module comprising means for  
5 generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transferring said first encrypted message to the smart card, said smart card comprising means for  
10 receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the conditional access module under said random key, said conditional access module having means to decrypt said transmissions received from the smart card.

In a further embodiment of the invention, said  
15 decoder comprises a conditional access module and a smart card, wherein said decoder comprises means for generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transferring said first encrypted message to the  
20 conditional access module, said conditional access module comprising means for receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the decoder under said random key, said decoder having means to decrypt said transmissions  
25 received from the conditional access module.

The invention will be further explained by reference to the drawings in which an embodiment of the method of the invention is explained as applied in a decoder for a pay TV system.

30 Fig. 1 shows a block diagram of an embodiment of the decoder according to the present invention.

Fig. 2 shows a sequence of steps of an embodiment of the method of the invention.

Referring to fig. 1 there is shown in a very schema-  
35 tical manner a block diagram of a decoder for a pay TV system, wherein digital information signals are scrambled using a control word in accordance with the Eurocrypt

standard for example. In this embodiment the decoder comprises a demodulator 1, a demultiplexer 2 and a decompression unit 3. The decoder further comprises a conditional access module or CAM 4 and a smart card 5 which can be inserted  
5 into a connection slot of the conditional access module 4. Further the decoder is provided with a microprocessor 6 for configuration and control purposes.

The conditional access module 4 is provided with a descrambler unit 7 and a microprocessor 8 having a memory 9.  
10 The smart card 5 comprises a microprocessor 10 having a memory 11.

As the operation of the above-mentioned parts of the decoder is not a part of the present invention, this operation will not be described in detail. Typically, the signal  
15 received by the demodulator 1 is a modulated data stream between 950 MHz and 2050 MHz. The output of the demodulator 1 is a scrambled digital data stream which is provided to the CAM 4 and the descrambler 7 will be allowed to descramble this scrambled data stream assuming that an authorized  
20 smart card has been inserted and the subscriber is entitled to receive the program. The descrambled data stream is demultiplexed by the demultiplexer 2 and decompressed and converted into the original analogue audio and video signal by the decompression unit 3.

25 In a pay TV system the control word required for descrambling, is transferred to the subscribers in so-called entitlement control messages containing the control word encrypted using a service key. This service key is downloaded in the memory 11 of the smart card 5 by means of  
30 a so-called entitlement management message for example. During operation the CAM 4 transfers the entitlement control messages towards the microprocessor 10 of the smart card 5 so that the microprocessor 10 can process the entitlement control message and extract the control word. Thereafter the  
35 smart card 5 returns the decrypted control word towards the CAM 4 so that the descrambler 7 is allowed to descramble the digital data stream received from the demodulator 1.

In order to prevent the use of an unauthorized smart card 5 in combination with the CAM 4 it is important to provide a secure communication between the CAM 4 and the smart card 5. According to the present invention the following method is used to provide such a secure communication. The steps of this method are shown in fig. 2. When a smart card is inserted into the decoder, the microprocessor 8 of the CAM 4 will generate two random numbers  $C_i$  and  $A$ . The microprocessor 8 will encrypt in a first message the random numbers  $C_i$  and  $A$  under a public key of the CAM 4. The thus obtained first message is transferred to the smart card 5 and the microprocessor 10 will decrypt this first message using the secret key of the CAM 4. Thereafter the microprocessor 10 will return a second message to the CAM 4, said second message being the random number  $A$  encrypted under the number  $C_i$  used as encryption key. The microprocessor 8 of the CAM 4 decrypts this second message and verifies whether the random number  $A$  is correct. Assuming that the random number  $A$  is indeed correct, so that it may be assumed that the inserted smart card 5 is an authorized smart card, the CAM 4 will then forward entitlement control messages containing the encrypted control word to the smart card 5 which will process the entitlement control message and extract the control word in a conventional manner. However, in the return message towards the CAM 4, the smart card will forward the extracted control word encrypted under the key  $C_i$  and these encrypted control words are decrypted by the microprocessor 8 using the same key  $C_i$ . As soon as one tries to replace the inserted smart card 5 by an other smart card, for example by switching from the authorized smart card 5 to an unauthorized smart card, the CAM 4 will immediately establish such change as the key  $C_i$  will not be known to the new smart card, so that the CAM will no longer be able to descramble the return messages containing the control word. Thereby the descrambler unit 7 will be disabled.

The method described can be used in the same manner for providing a secure communication between the CAM 4 and

the decoder, wherein the same protocol as shown in fig. 2 is followed.

In summary it will be understood that if a new CAM 4 is connected to the other decoder parts, the microprocessor 5 6 of the decoder will generate the two random numbers  $C_i$  and A and as soon as the microprocessor 6 has decrypted the second message received from the microprocessor 8 of the CAM 4, and has verified that the random number A is correct, the key  $C_i$  will be used in all transmissions between the CAM 4 10 and the microprocessor 6.

The invention is not restricted to the above-described embodiments which can be varied in a number of ways within the scope of the claims. As an example for a further embodiment the CAM (i.e. the descrambler) may be part of the 15 decoder. The decoder would now challenge the smart card to authenticate itself to obtain a secure communication between the smart card and the decoder.

## CLAIMS

1. Method for providing a secure communication between two devices, wherein a first device generates a random key (Ci) and transfers said key to a second device in a first message encrypted using a public key, wherein said  
5 second device decrypts the first encrypted message by means of a corresponding secret key to obtain said random key (Ci), wherein said random key is used to encrypt and decrypt transmissions between said devices.

2. Method according to claim 1, wherein after decrypt-  
10 ting said encrypted message, said second device first returns said random key (Ci) in a second encrypted message with an authentication to said first device.

3. Method according to claim 2, wherein for providing said authentication said first device further generates a  
15 random number (A) and transfers this random number (A) together with said random key (Ci) in said first encrypted message to the second device, wherein the second device uses said random number (A) for authentication in the second encrypted message.

20 4. Method according to claim 3, wherein said second device encrypts said random number (A) under said random key (Ci) to obtain said second encrypted message.

5. Application of the method of anyone of the preceding claims in a decoder for a pay TV system, wherein said  
25 decoder comprises a conditional access module (CAM) and a smart card (SC), wherein said method is applied to provide a secure communication between the control access module and the smart card.

6. Application of the method of anyone of claims 1-4  
30 in a decoder for a pay TV system, wherein said decoder comprises a conditional access module (CAM) and a smart card (SC), wherein said method is applied to provide a secure communication between the decoder and the conditional access module.



7. Decoder for a pay TV system, comprising a conditional access module and a smart card, said conditional access module comprising means for generating a random key (Ci), means for encrypting said key in a first encrypted message  
5 using a public key encryption method, means for transferring said first encrypted message to the smart card, said smart card comprising means for receiving and decrypting said first encrypted message to obtain said random key, means for encrypting transmissions to the conditional access module  
10 under said random key, said conditional access module having means to decrypt said transmissions received from the smart card.

8. Decoder according to claim 7, wherein said smart card comprises means for returning said random key to the  
15 conditional access module in a second encrypted message with an authentication.

9. Decoder according to claim 8, wherein said generating means of the conditional access module further generates a random number which is included in said first encrypted  
20 ted message, wherein the smart card is adapted to use said random number as authentication in the second encrypted message.

10. Decoder for a pay TV system, comprising a conditional access module and a smart card, wherein said decoder  
25 comprises means for generating a random key (Ci), means for encrypting said key in a first encrypted message using a public key encryption method, means for transferring said first encrypted message to the conditional access module, said conditional access module comprising means for receiving and decrypting said first encrypted message to obtain  
30 said random key, means for encrypting transmissions to the decoder under said random key, said decoder having means to decrypt said transmissions received from the conditional access module.

35 11. Decoder according to claim 10, wherein said conditional access module comprises means for returning said

random key to the decoder in a second encrypted message with an authentication.

12. Decoder according to claim 11, wherein said generating means of the decoder further generates a random number which is included in said first encrypted message, wherein the conditional access module is adapted to use said random number as authentication in the second encrypted message.

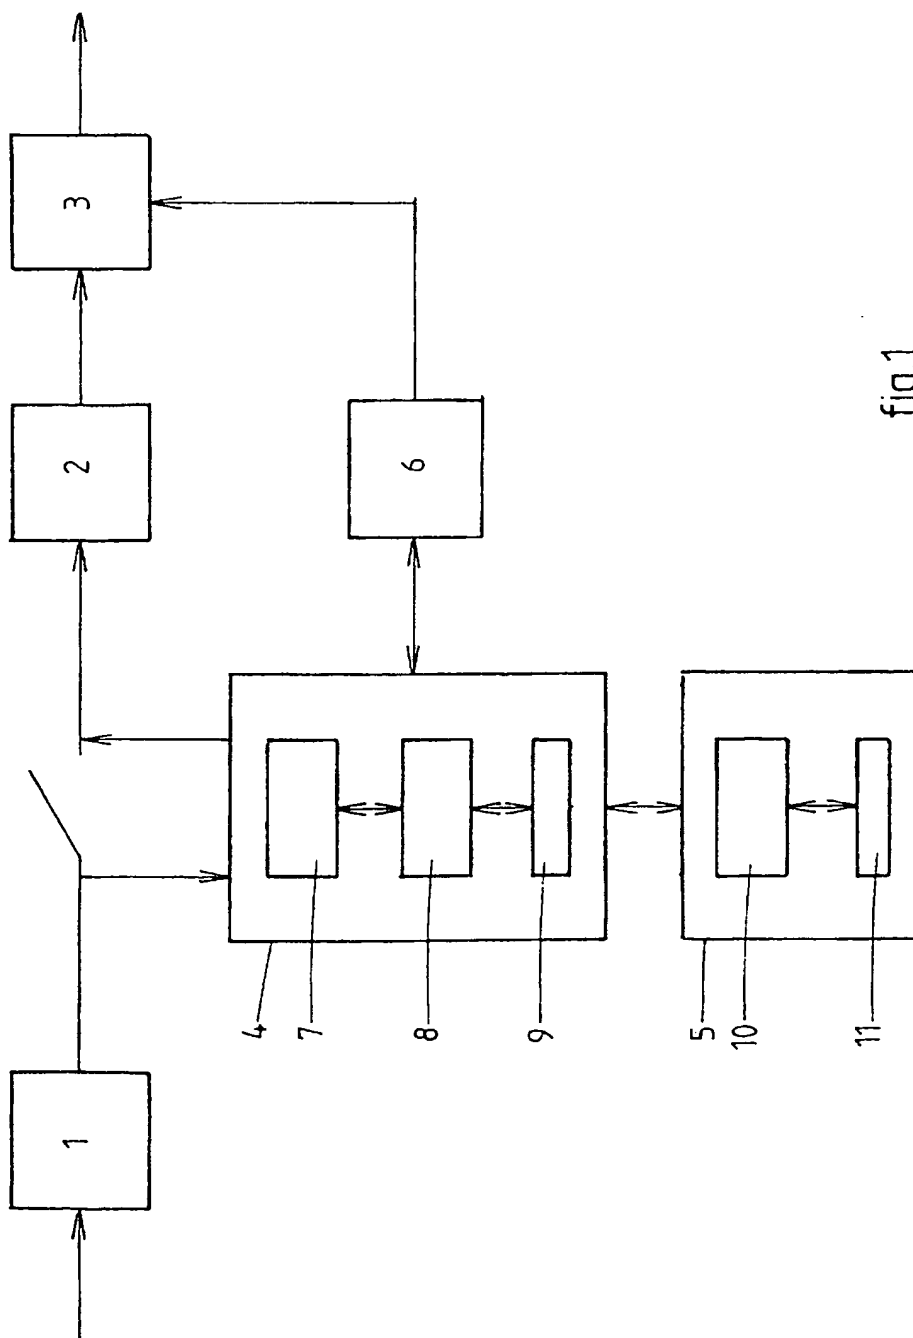


fig.1

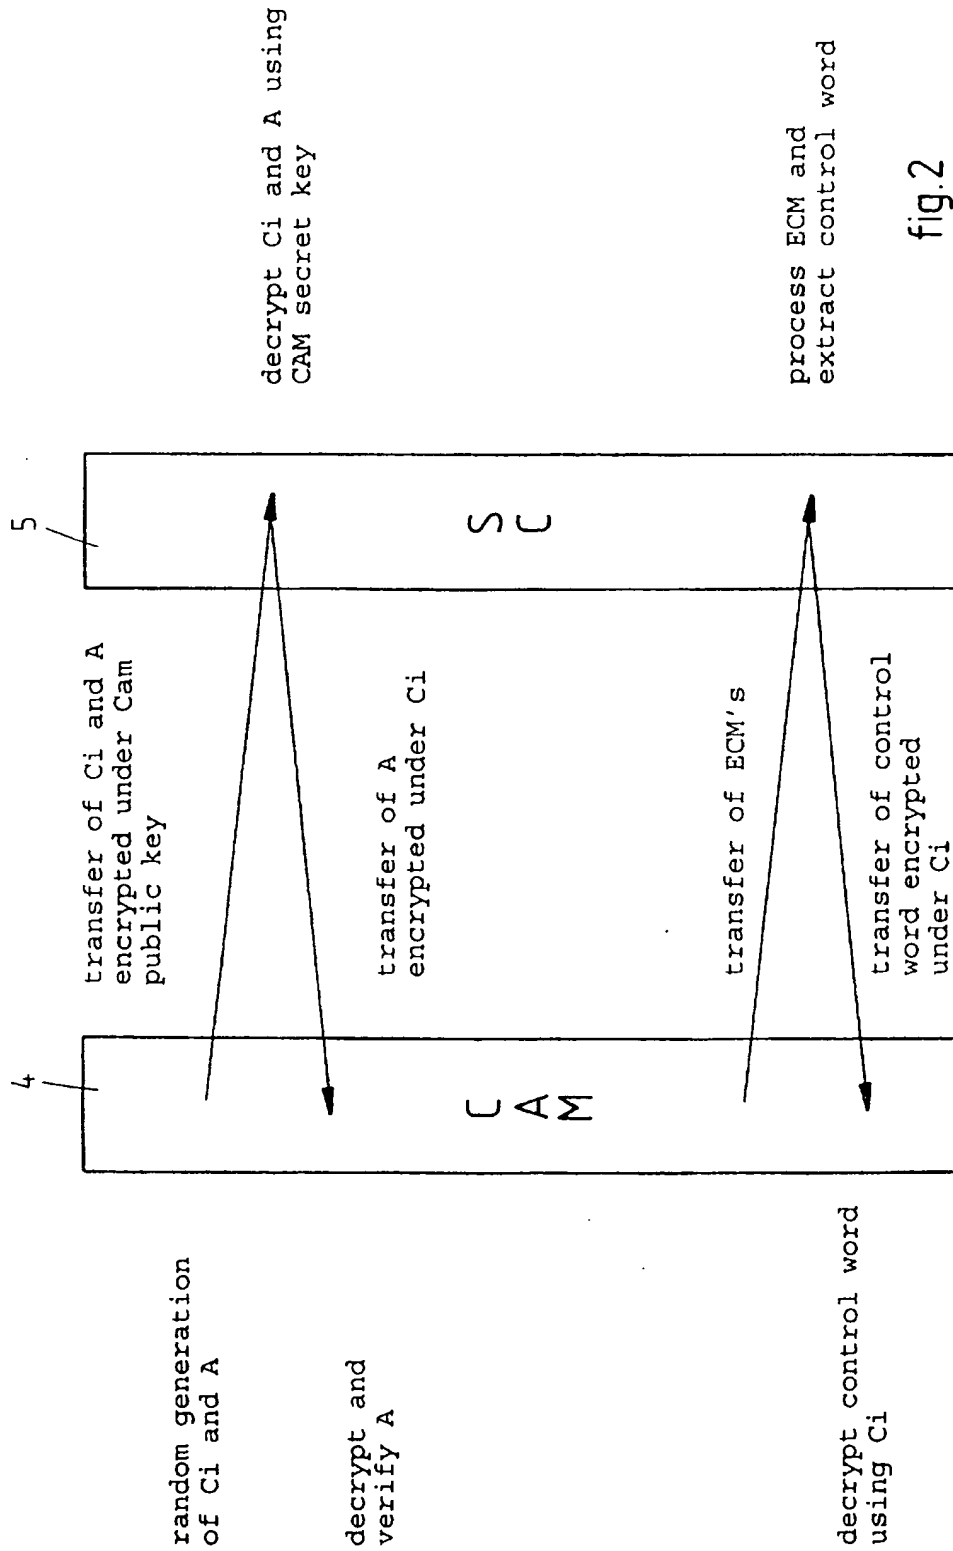


fig.2

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 97/01557

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 029 207 A (GAMMIE KEITH B) 2 July 1991  see abstract</p> <p>-----</p>	1,7,10